




Process
Automation

Our product brand:
IMI Maxseal

J70 Series 1/4" Spring Loaded Regulator

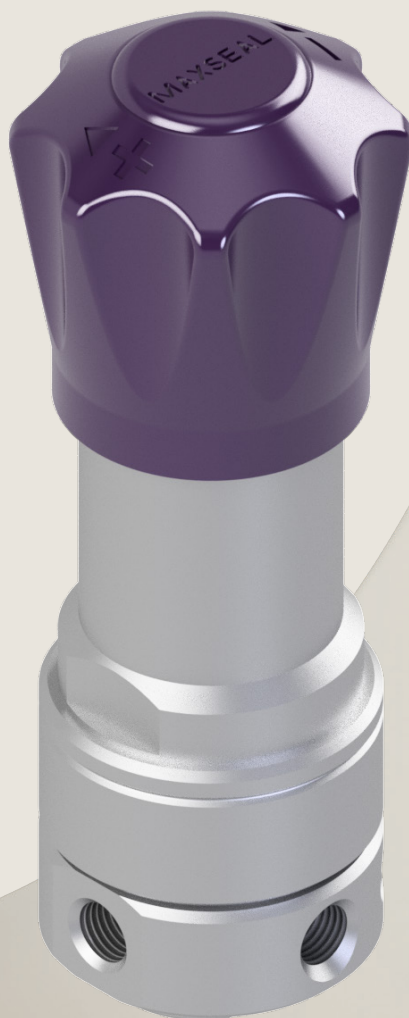

Breakthrough
engineering for
a better world

J70 Series 1/4" Spring Loaded Regulator

- Port size: 1/4" NPT
- High pressure regulation with a wide range of delivery pressure
- Up to 414 bar inlet pressure (standard pressure version) / up to 700 bar inlet pressure (high pressure version)
- Heavy duty construction, accurate and reliable, ideal for high and low pressure applications
- 2.4mm valve seat provides stable delivery pressure with varying inlet pressure
- Low friction piston for increased sensitivity and better control at lower pressure ranges
- Temperature rating down to -50°C
- Certifications: ATEX 94/9/EC, PED 2014/68/EU, EN 12266-1



Technical features

Medium:
Gas or Liquid

Flow:

Cv Kv
0.12 0.1

Cv is USgpm for 1 psi Δp
Kv is l/min for 1 bar Δp

Leakage:

ANSI/FCI 70-3 Class VI
and API 598

Envelope (LxWxH):

69 x 69 x 196

Port Size:

1/4" NPT

Gauge Port:

3 x 1/4" NPT - optional
configurations

Pressure Range:

bar	psi
2 ... 20	29 ... 290
5 ... 50	72 ... 725
10 ... 100	145 ... 1450
20 ... 200	290 ... 2900
40 ... 414	600 ... 6000
70 ... 700*	1015 ... 10150

*HP version only

Temperature Range:

	°C	°F
NBR	-10 ... +100	14 ... +212
FKM	-20 ... +100	-4 ... +212
EPDM	-30 ... +100	-22 ... +212
Low temp. NBR	-50 ... +100	-58 ... +212

Extended temperature ranges available -
contact sales

Materials:

Valve body: SS 316L
Trim: SS 316L
Stem: SS 316L
Springs: SS 301
Seals: NBR, FKM, EPDM, low temperature NBR

Features:

1/8" NPT Ported vent
Panel Mounting - optional kit

Options:

Tamper-proof stem cap
NACE MR0175/ISO 15156
compliant (non-vented only)
Clean to ASTM G93 level C
and/or CGA G-4.1
Limit stop for pressure
control range

Technical data

Maximum Inlet Pressure bar (psig):	414 (6000) SP version 700 (10150) HP version
Maximum Outlet Control Pressure bar (psig):	414 (6000) SP version 700 (10150) HP version
Sensing Type:	Piston
Seat Diameter (mm/in.):	2.4 (3/32")
Connection Options:	1/4" NPT
Gauge / Vent Connections:	Gauge: 1/4" NPT Vent: 1/8" NPT
Weight kg (lbs):	1.8 (4)



Option selector

Build a J70 series regulator ordering number by combining the designators in the sequence shown below.

Example part number:

1	2	3	4	5	6	7	8	9	10	11	12	13
J70	A9	A1	S	W	R	N	A	H	F	O	P	O

1 Model 1/4" Spring Loaded Regulator J70	5 Outlet Pressure Range bar psi 2 ... 20 29 ... 290 R 5 ... 50 72 ... 725 W 10 ... 100 145 ... 1450 Y 20 ... 200 290 ... 2900 3 40 ... 414 600 ... 6000 6 70 ... 700* 1015 ... 10150* 9	7 Elastomers NBR N FKM V EPDM E Low temp NBR Q	9 Handwheel Standard H Handwheel with limit stop L Tamper proof T	11 NACE None 0 NACE (non-relieving) N
2 Body Material Stainless Steel A9	6 Relieving Relieving R Non-relieving N	8 Port Locations** A B C D	10 Filter None 0 Filter (25µm) - gases only F	12 Panel Mounting None 0 With panel mounting P
3 Port Size 1/4" NPT A1				13 Cleanliness Standard 0 Oxygen Service C Hydrogen H
4 Max Inlet Pressure bar psi 414 6000 S 700 10150 H				

*HP version only

**See port configurations

Spares option selector

Example part number:




1	2	3	4	5	6	7	8	9	10
J70	S	S	W	R	N	H	F	O	O

1 Model 1/4" Spring Loaded Regulator J70	4 Outlet Pressure Range bar psi 2 ... 20 29 ... 290 R 5 ... 50 72 ... 725 W 10 ... 100 145 ... 1450 Y 20 ... 200 290 ... 2900 3 40 ... 414 600 ... 6000 6 70 ... 700* 1015 ... 10150* 9	6 Elastomers NBR N FKM V EPDM E Low temp NBR Q	8 Filter None 0 Filter (25µm) - gases only F
2 Type Spares S	5 Relieving Relieving R Non-relieving N	7 Handwheel Standard H Handwheel with limit stop L Tamper proof T	9 NACE None 0 NACE (non-relieving) N
3 Max Inlet Pressure bar psi 414 6000 S 700 10150 H			10 Cleanliness Standard 0 Oxygen Service C Hydrogen H

*HP version only

Flow data


The graphs illustrate the change or "droop" in outlet pressures as the flow rate increases. Droop refers to the reduction in outlet pressure that arises from an increase in flow rate through the regulator.

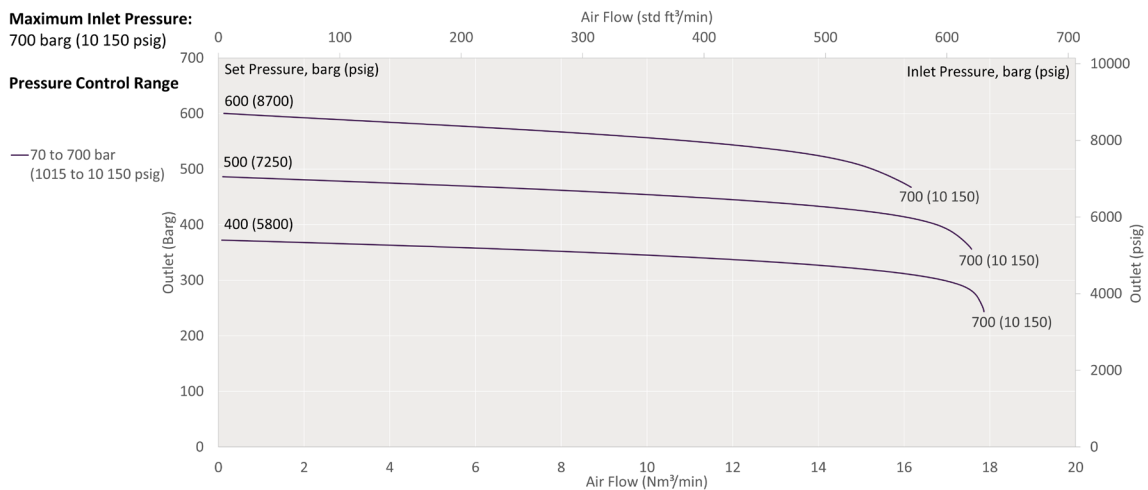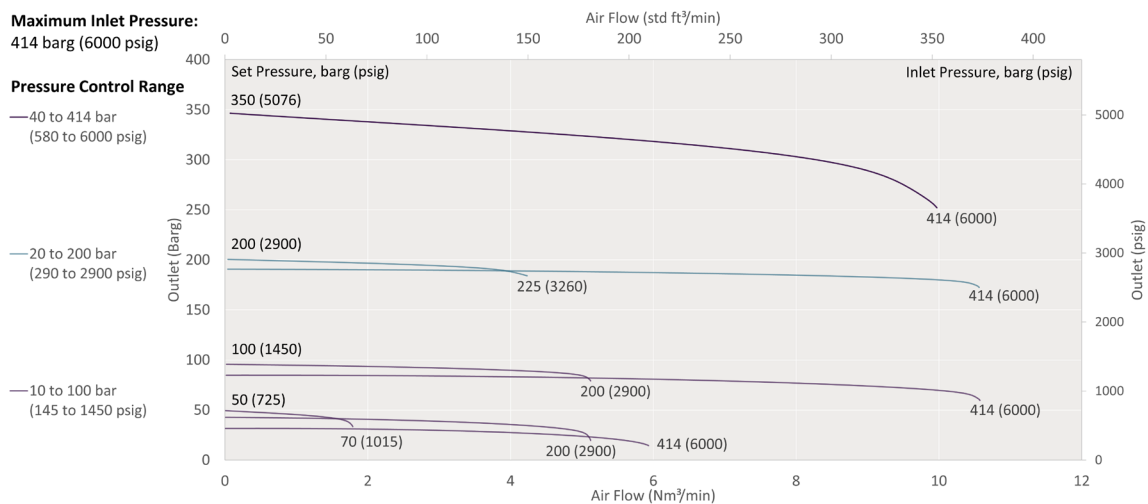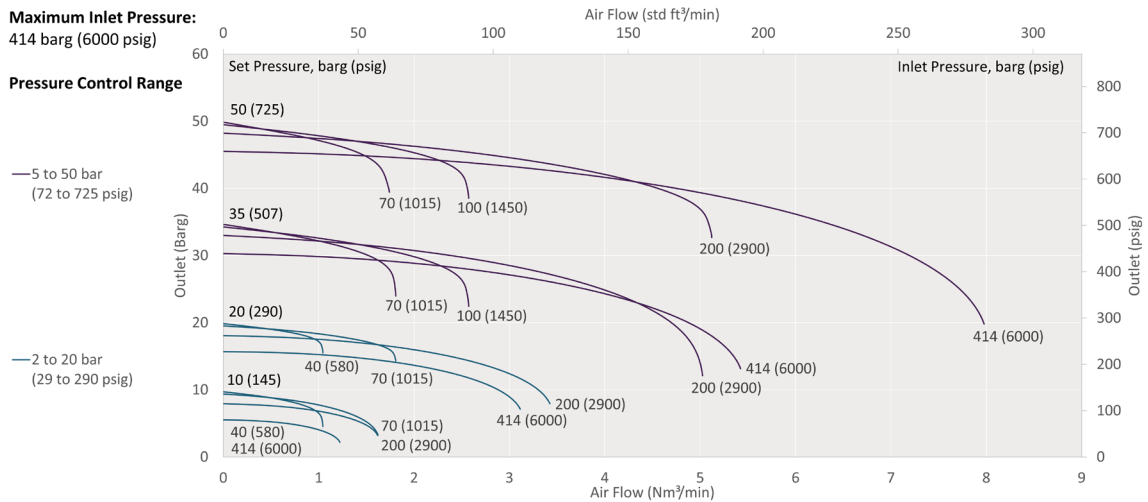

WARNING: Flow curves are generated from data collected under laboratory conditions which may not be fully representative of real-world applications. Real-world valve performance may vary from the curve presented. Tests are conducted using air at 20°C with an assumed fixed density of 1.2 kg/m³.

Failure flow


Failure flow for a range of inlet pressures.

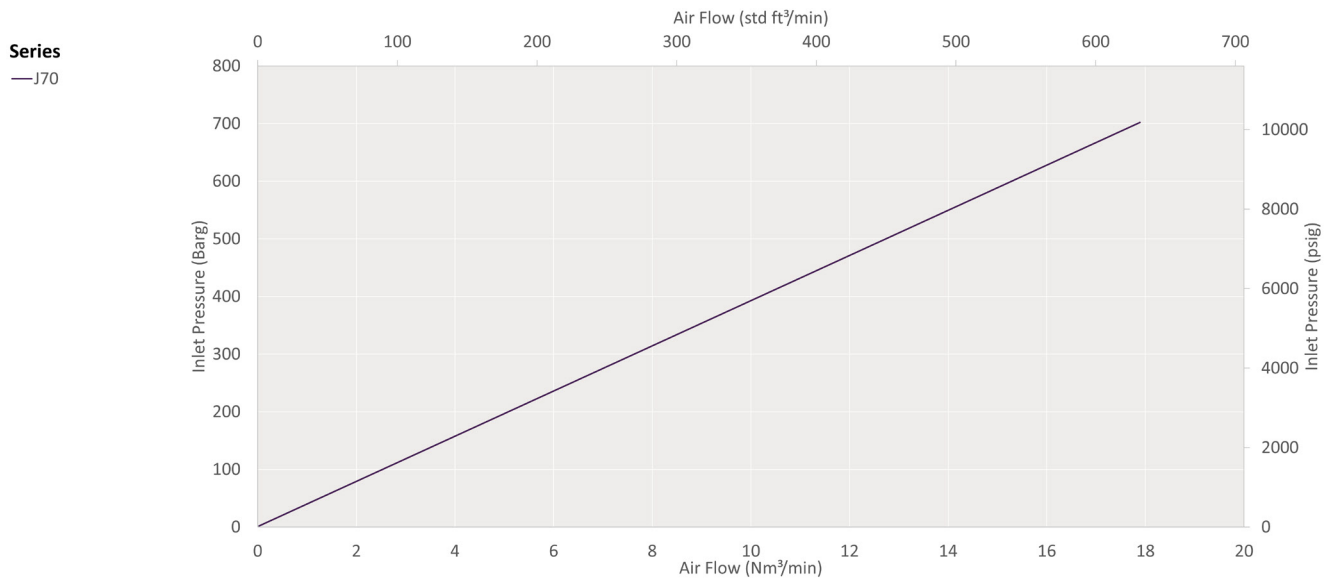

WARNING: Flow curves are generated from data collected under laboratory conditions which may not be fully representative of real-world applications. Real-world valve performance may vary from the curve presented. Tests are conducted using air at 20°C with an assumed fixed density of 1.2 kg/m³.


Dimensions

Dimensions in mm (inches)
projection/third angle

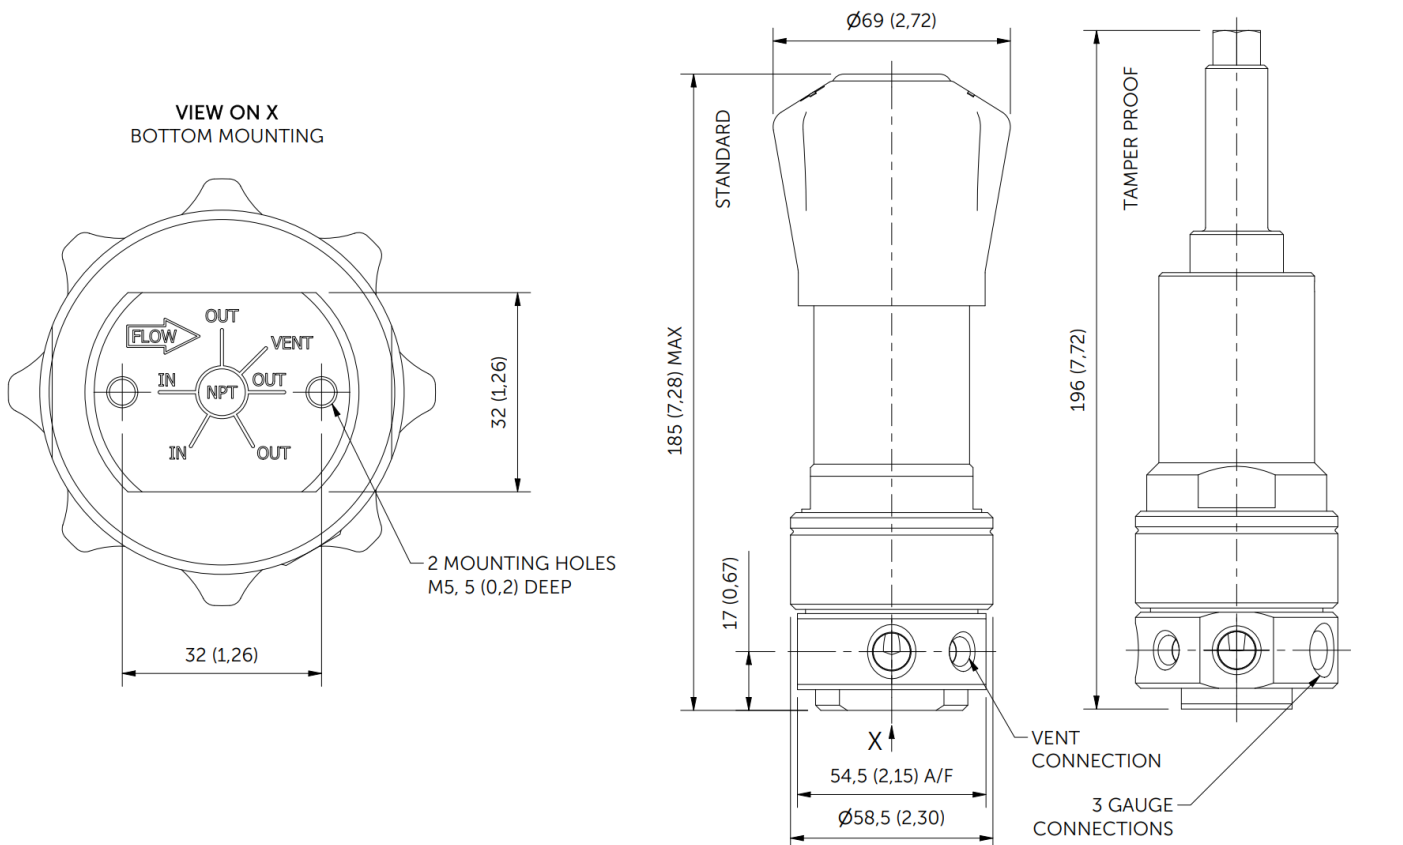


Dimensions are for reference only and are subject to change.

Panel mounting

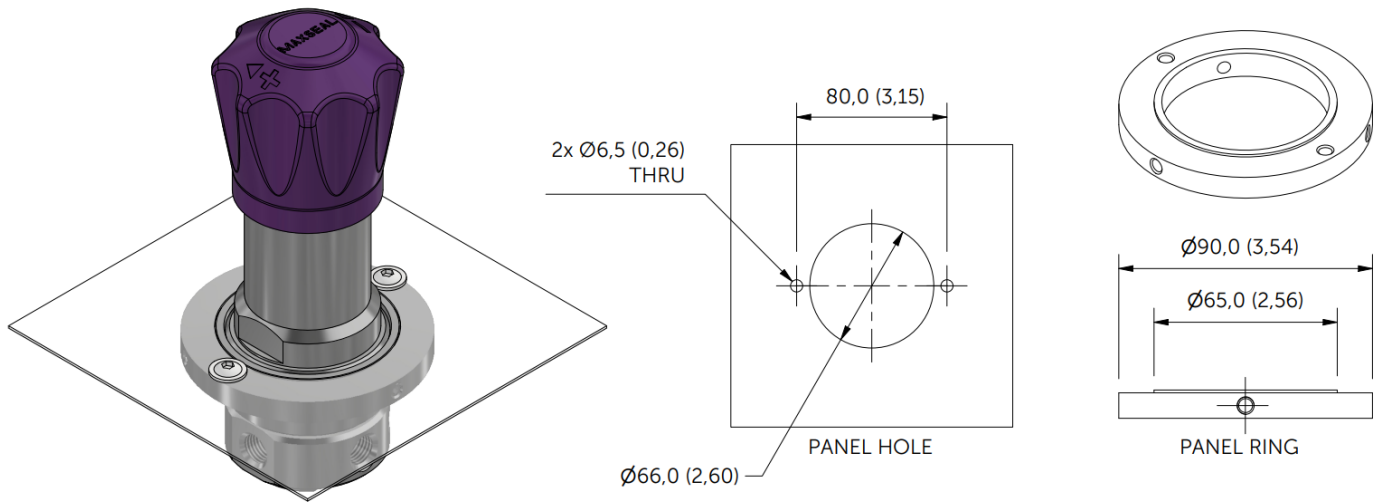

Port configurations

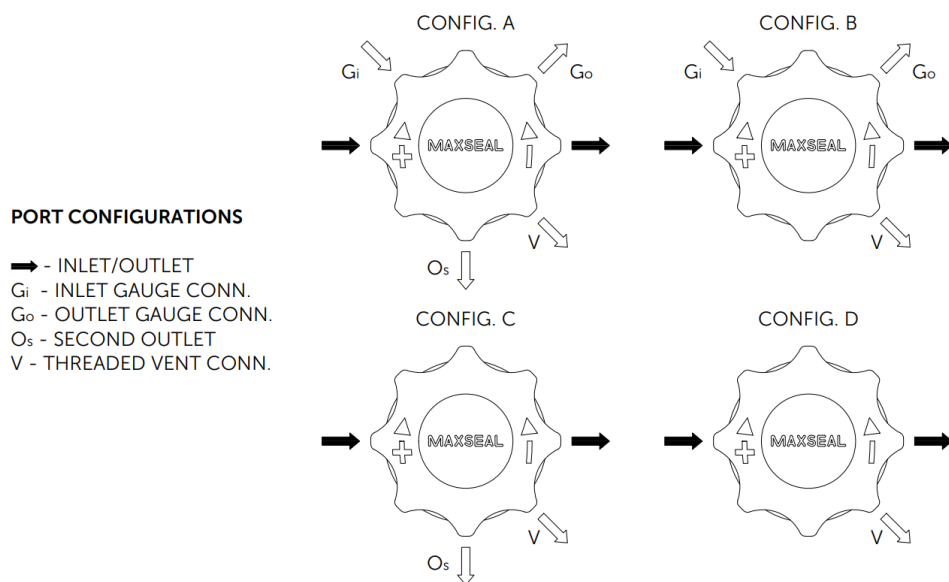

Warning

Do not use these products where pressures and temperatures can exceed those listed under [Technical Features](#) and [Technical Data](#).

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Thompson Valves Ltd.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes. The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure. System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided. System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.

The information in this brochure is provided for informational and promotional purposes only and is provided "as is" and without warranties of any kind, whether express or implied, including but not limited to implied warranties of satisfactory quality, fitness for a particular purpose and/ or correctness. Any specifications, features, pricing, or availability contained in this brochure are subject to change without prior notice. IMI plc does not represent or warrant that the information and/ or specification in this brochure are accurate, complete, or current and therefore make no warranties or representation regarding the use of the content. IMI plc or one of its subsidiaries own all images (unless credited otherwise), logos, product brands, and trademarks mentioned in this brochure. Unauthorized use, reproductions, or modification of this content is prohibited. © Copyright IMI plc. All rights reserved.

For further information, scan the QR code or contact
sales.thompson@imi-critical.com



Process Automation

Our product brand:
IMI Maxseal

17 Balena Cl, Creekmoor,
Poole BH17 7EF
United Kingdom

www.imiplc.com

04006.02/24.3n



Authorised Distributor:



46, Jalan SS 22/21, Damansara Jaya,
47400 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.
Email: ampmech@ampmech.com
Website: www.ampmech.com