
MTII 4300™

Magnetostrictive Transmitter

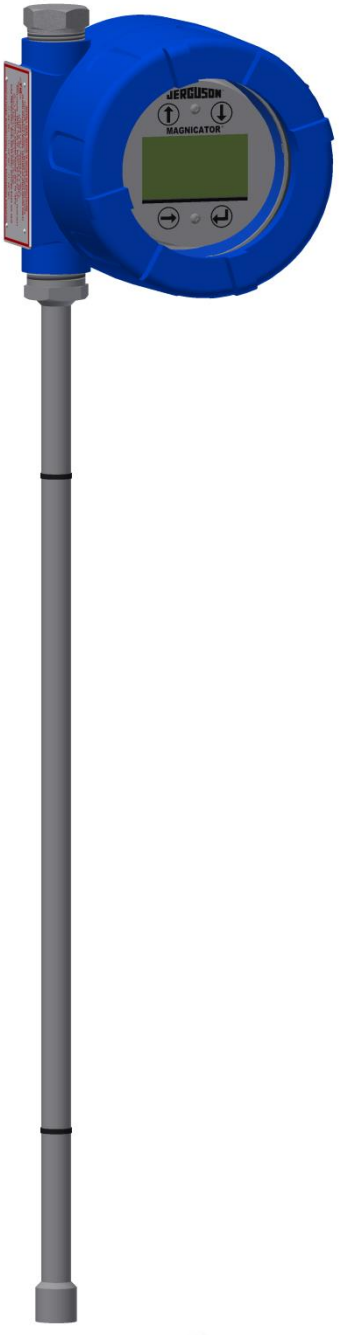

- 4-20 mA loop powered ; 10.5 to 28 VDC
- HART 7 protocol communications standard
- SIL2 Certified (HART Only)
- Sensing lengths from 6 inches to 228 inches (15 cm to 6 meters).
- Continuous level measurement with repeatability to .001% F.S. or 0.015 in.
- FM approved for use in hazardous locations:
  - Class I Division 1 Groups B,C& D
  - Class II Division 1 Groups E,F, & G
- CFM, ATEX, IECEx available; Contact Factory
- NEMA 4X Enclosure Standard – 316SS optional
- Easily mounts to Magnicator without removing vessel from service - No contact with fluid
- Multi-tiered Menu accessible via magnetic stylus through window – No need to remove cover!
- Reverse polarity protection (series diode)
- Lightning / Transient protection:
  - Line-to-ground surge suppression; EN 61000-4-5
  - Line-to-line and line-to-ground transient suppressors; EN 61000-4-4

FM US APPROVED

JERGUSON®
A PRODUCT OF CLARK-RELIANCE
16633 Foltz Parkway ● Strongsville, OH 44149 USA Telephone: (440) 572-1500 ● Fax: (440) 238-8828
www.clark-reliance.com ● sales@clark-reliance.com

MTII4300 Magnetostrictive Transmitter

See M500.31 for complete specifications, installation, & operating instructions

MODEL NUMBER DESIGNATION
MTII4300-#-#-#-#-#-#-###/###-#

MODEL:

COMM OPTION:
H= HART
S= SIL2 W/HART

HOUSING:
A= ALUMINUM w/ WINDOW (STD.)
S= STAINLESS STEEL w/ WINDOW

TRANSMITTER ORIENTATION:
A= TOP LEFT HAND (STD.)
B= TOP RIGHT HAND
C= BOTTOM RIGHT HAND
D= BOTTOM LEFT HAND

LCD DISPLAY:
M= mA OUTPUT (DEFAULT)
I= INCHES
P= PERCENT
B= MILLIMETERS
C= CENTIMETERS
D= METERS
E= FEET


AGENCY APPROVAL:
F= FM, CL I DIV1, GRP B,C,D, T6

ACTIVE SENSING LENGTH:
IN INCHES


MAX SENSING LENGTH:
IN INCHES, ON 6 INCH INCREMENTS

MOUNTING STYLE:
S= STRAIGHT (STD.)
H= HIGH TEMP EXTENDED

ALARM SETTING:
L= 3.6 mA (DEFAULT)
H= 20.5 mA

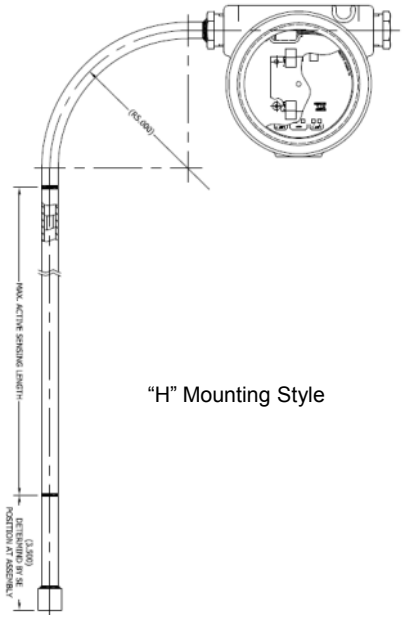

"H" Mounting Style

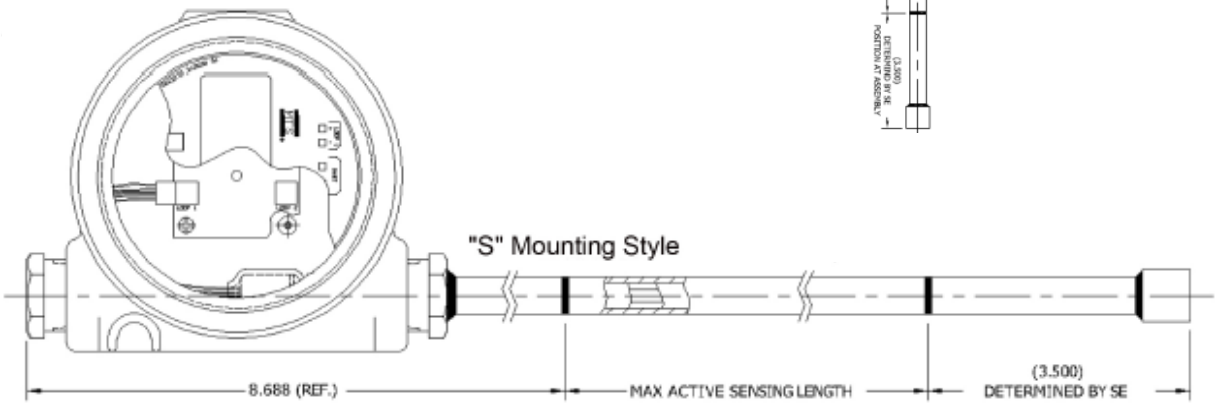

GENERAL SPECIFICATIONS

Sensor Length	6"-228" (152mm-5791mm) for "S" Mounting Style 6"-144" (152mm-3657mm) for "H" Mounting Style
Area Classification	FMRC Class I Division 1 Groups B,C, & D
Wiring	2 wire shielded twisted pair, 24AWG min - 14AWG max
Conduit Connection	3/4" FNPT
Wiring Connection	Screw Terminal
Input Power	10.5-28VDC

OUTPUT

Fail Safe	3.5 (Default, Low), 22.8 (High)
Repeatability	.01% F.S. or 0.15 in. whichever is greater
Temperature Sensitivity	Zero:<.005% per C (.003% per F)
Operating Temperature	Module -30F to 160F (-34C to -71C) Sensing Element -40F to 257F (-40C to 125C) Electronics -40F to 160F (-40C to 71C)
Recommended Product Temperature	- 30F to 450F (-34C to 232C) Standard 650F (343C) High Temp Extended
Calibration	1-pt calibration (transmitter must have valid level at time of calibration) Field adjustable zero and span settings

NOTE: contact factory for transmitter applications with insulation

JERGUSON®
A PRODUCT OF CLARK-RELIANCE

Authorised Distributor:
NATIONWIDE OIL & GAS
46, Jalan SS 22/21, Damansara Jaya,
47400 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.
Email: nog@nog.com.my
Website: www.nog.com.my